



船用防火门

Marine Fireproof Door

CB*3234

一、适用范围 Scope of Use

各类船舶及海洋工程建筑物上具有耐火分隔要求的舱室和生活模块。

The cabins & living modules with fireproof division requirement of structures on various ships and sea projects.

二、型材图例 Figures of Profile

2.1 分类及型式 Classification and types

等级 CLASS		开向 OPENING DIRECTION	备注 REMARK	适应舱壁 Used for the bulkhead		
A	A60	右外 RO 右内 RI 左外 LO 左内 LI	可带应急逃生出口 With E.E.	单层壁	双层壁	三层壁
	A30			Single wall	Double wall	Three-layer wall
	A15		可带应急逃生风栅或窗 With E.E. vent louver & window			
	A0					
B	B0					
	B15					

2.2 规格及尺寸 Types and size

等级 Class	通孔尺寸 Clear size HCXWC	门框外形尺寸 Size of door frame HBXWB	围壁开孔尺寸 Cut in Bulkhead HXW	门框厚度 Thickness of Door Frame D
A级 Class A	1600x600	1693x693	1700x700	D=T + 50 (T为装饰壁厚度) (T for Thickness of decoration layer)
	1600x650	1693x743	1700x750	
	1600x700	1693x793	1700x800	
	1600x750	1693x843	1700x850	
	1650x600	1743x693	1750x700	
	1650x650	1743x743	1750x750	
	1650x700	1743x793	1750x800	
	1650x750	1743x843	1750x850	
	1650x800	1743x893	1750x900	
	1700x600	1793x693	1800x700	
1700x650	1793x743	1800x750		
1700x700	1793x793	1800x800		
1700x750	1793x843	1800x850		
1700x800	1793x893	1800x900		
B级 Class B	1750x600	1843x693	1850x700	
	1750x650	1843x743	1850x750	
	1750x700	1843x793	1850x800	
	1750x750	1843x843	1850x850	
	1750x800	1843x893	1850x900	
	1800x600	1893x693	1900x700	
	1800x650	1893x743	1900x750	
	1800x700	1893x793	1900x800	
	1800x750	1893x843	1900x850	
	1800x800	1893x893	1900x900	
1850x600	1943x693	1950x700		
1850x650	1943x743	1950x750		
1850x700	1943x793	1950x800		
1850x750	1943x843	1950x850		
2000x900	2093x993	2100x1000		

A60/A30级防火门

A60/A30 Class Steel Fireproof Door

CB/T3518.3


一、适用范围 Scope of Use

各类船舶及海洋工程建筑物上具有耐火分隔要求的舱室和生活模块。

The cabins & living modules with fireproof division requirement of structures on various ships and sea projects.

二、A60/A30级孔防火门图例说明

Figure of A60/A30 class steel fireproof door

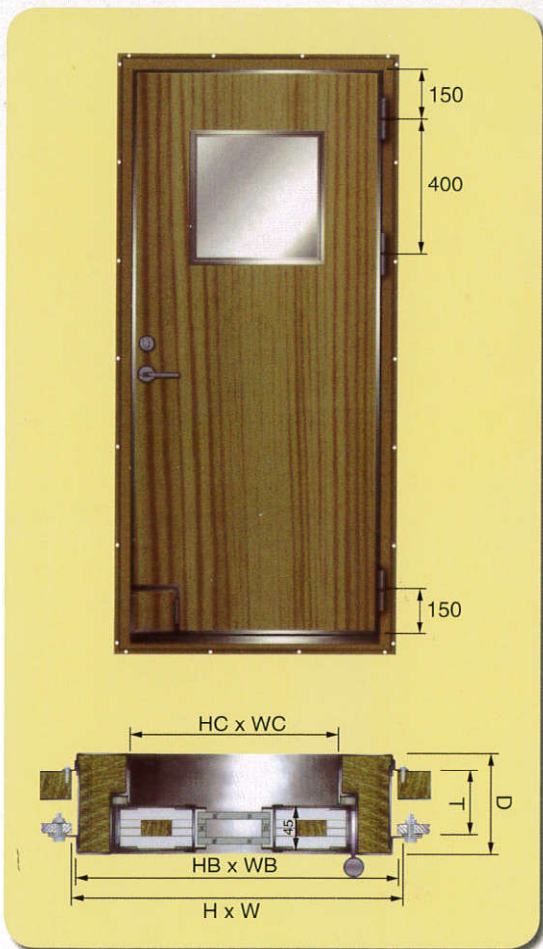

标记示例

1、通孔尺寸1600x600，门框厚度为150，右外开，双层壁，带方窗400x400，带消防孔，A60级防火门：防火门 A60 1600x600-150-RO 方窗400x400 带消防孔

Identification example:

1、Clear size 1600x600,thickness of door frame 150mm,right outside opening,double wall,with square window 400x400,with hose port,class A60 fireproof door:

Fireproof door A60 1600x600-150-RO square window 400x400 with hose port

适应舱壁 Used for the bulkhead



规格及尺寸 Types and size

通孔尺寸 Clear size HCxWC	门框外形尺寸 Size of door frame HBxWB	围壁开孔尺寸 Cut in Bulkhead HXW	门框厚度 Thickness of Door Frame D
1600x600	1693x693	1700x700	D=T + 50 (T为装饰壁厚度) (T for Thickness of decoration layer)
1600x650	1693x743	1700x750	
1600x700	1693x793	1700x800	
1600x750	1693x843	1700x850	
1650x600	1743x693	1750x700	
1650x650	1743x743	1750x750	
1650x700	1743x793	1750x800	
1650x750	1743x843	1750x850	
1650x800	1743x893	1750x900	
1700x600	1793x693	1800x700	
1700x650	1793x743	1800x750	
1700x700	1793x793	1800x800	
1700x750	1793x843	1800x850	
1700x800	1793x893	1800x900	
1750x600	1843x693	1850x700	
1750x650	1843x743	1850x750	
1750x700	1843x793	1850x800	
1750x750	1843x843	1850x850	
1750x800	1843x893	1850x900	
1800x600	1893x693	1900x700	
1800x650	1893x743	1900x750	
1800x700	1893x793	1900x800	
1800x750	1893x843	1900x850	
1800x800	1893x893	1900x900	
1850x600	1934x693	1950x700	
1850x650	1934x743	1950x750	
1850x700	1934x793	1950x800	
1850x750	1934x843	1950x850	
2000x900	2093x993	2100x1000	



A15/A0级防火门

15/A0 Class Steel Fireproof Door

一、适用范围 Scope of Use


各类船舶及海洋工程建筑物上具有耐火分隔要求的舱室和生活模块。

The cabins & living modules with fireproof division requirement of structures on various ships and sea projects.

CB/T3518.3

二、A15/A0级防火门图例说明

Figure of B15/B0 class fireproof door

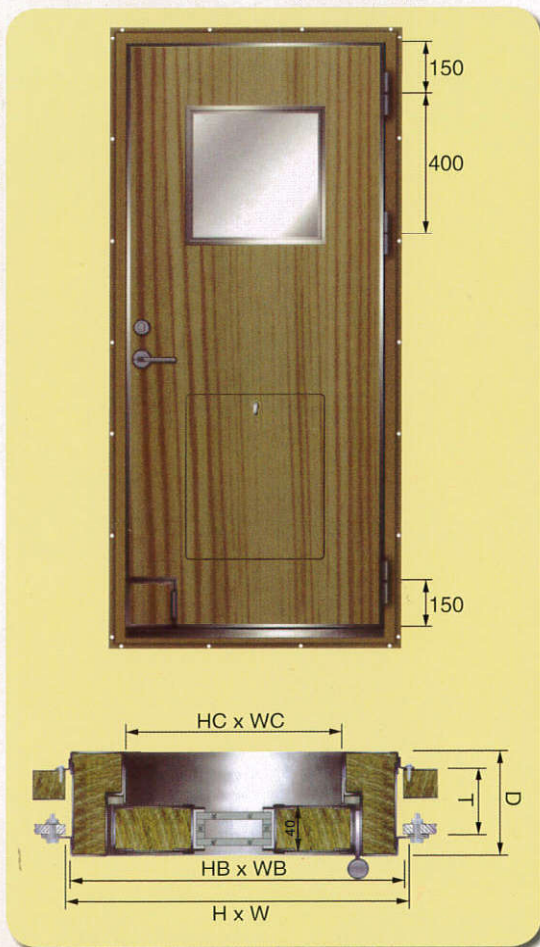

标记示例

1、通孔尺寸1600x600，门框厚度为150，右外开，双层壁，带方窗400x400，带消防孔，A15级防火门：防火门 A15 1600x600-150-RO 方窗400x400 带消防孔


Identification example:

1、Clear size 1600x600, thickness of door frame 150mm, right outside opening, double wall, with square window 400x400, with hose port, class A15 fireproof door:

Fireproof door A15 1600x600-150-RO square window 400x400 with hose port

适应舱壁 Used for the bulkhead


单层壁
Single wall



双层壁
Double wall



三层壁
Three-layer wall



规格及尺寸 Types and size

通孔尺寸 Clear size HCXWC	门框外形尺寸 Size of door frame HBXWB	围壁开孔尺寸 Cut in Bulkhead HXW	门框厚度 Thickness of Door Frame D
1600x600	1693x693	1700x700	D=T + 50 (T为装饰壁厚度) (T for Thickness of decoration layer)
1600x650	1693x743	1700x750	
1600x700	1693x793	1700x800	
1600x750	1693x843	1700x850	
1650x600	1743x693	1750x700	
1650x650	1743x743	1750x750	
1650x700	1743x793	1750x800	
1650x750	1743x843	1750x850	
1650x800	1743x893	1750x900	
1700x600	1793x693	1800x700	
1700x650	1793x743	1800x750	
1700x700	1793x793	1800x800	
1700x750	1793x843	1800x850	
1700x800	1793x893	1800x900	
1750x600	1843x693	1850x700	
1750x650	1843x743	1850x750	
1750x700	1843x793	1850x800	
1750x750	1843x843	1850x850	
1750x800	1843x893	1850x900	
1800x600	1893x693	1900x700	
1800x650	1893x743	1900x750	
1800x700	1893x793	1900x800	
1800x750	1893x843	1900x850	
1800x800	1893x893	1900x900	
1850x600	1943x693	1950x700	
1850x650	1943x743	1950x750	
1850x700	1943x793	1950x800	
1850x750	1943x843	1950x850	
2000x900	2093x993	2100x1000	

B15/B0级防火门

B15/B0 Class Steel Fireproof Door

CB/T3518.3


一、适用范围 Scope of Use

各类船舶及海洋工程建筑物上具有耐火分隔要求的舱室和生活模块。

The cabins & living modules with fireproof division requirement of structures on various ships and sea projects.

二、B15/B0级防火门图例说明

Figure of B15/B0 class fireproof door

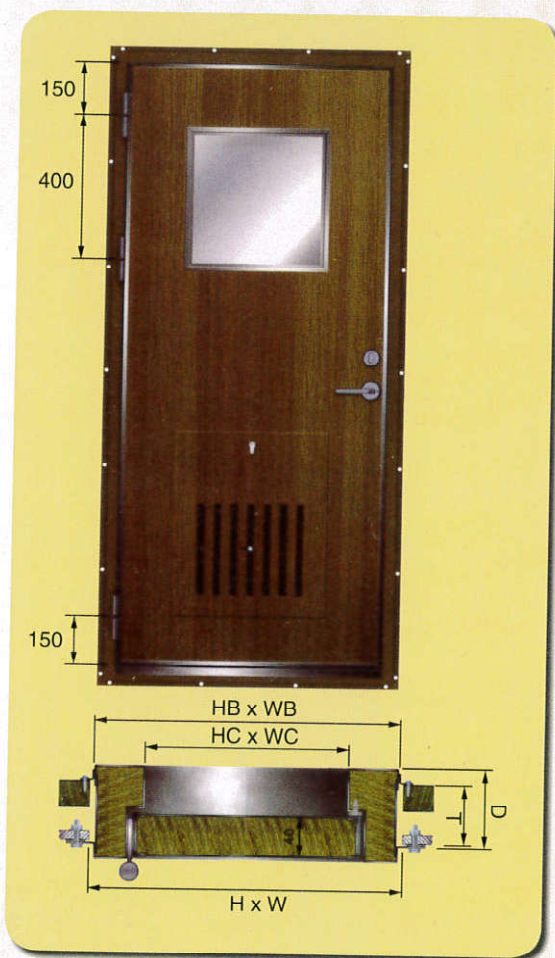

规格及尺寸 Types and size

通孔尺寸 Clear size HCXWC	门框外形尺寸 Size of door frame HBXWB	围壁开孔尺寸 Cut in Bulkhead HXW	门框厚度 Thickness of Door Frame D
1600x600	1693x693	1700x700	D=T + 50 (T为装饰壁厚度) (T for Thickness of decoration layer)
1600x650	1693x743	1700x750	
1600x700	1693x793	1700x800	
1600x750	1693x843	1700x850	
1650x600	1743x693	1750x700	
1650x650	1743x743	1750x750	
1650x700	1743x793	1750x800	
1650x750	1743x843	1750x850	
1650x800	1743x893	1750x900	
1700x600	1793x693	1800x700	
1700x650	1793x743	1800x750	
1700x700	1793x793	1800x800	
1700x750	1793x843	1800x850	
1700x800	1793x893	1800x900	
1750x600	1843x693	1850x700	
1750x650	1843x743	1850x750	
1750x700	1843x793	1850x800	
1750x750	1843x843	1850x850	
1750x800	1843x893	1850x900	
1800x600	1893x693	1900x700	
1800x650	1893x743	1900x750	
1800x700	1893x793	1900x800	
1800x750	1893x843	1900x850	
1800x800	1893x893	1900x900	
1850x600	1943x693	1950x700	
1850x650	1943x743	1950x750	
1850x700	1943x793	1950x800	
1850x750	1943x843	1950x850	
2000x900	2093x993	2100x1000	

标记示例

1、通孔尺寸1800x650，门框厚度为150，右内开，双层壁，B0级防火门：防火门 B0 1800x650-150-RI

Identification example:

1、Clear size 1800x650, thickness of door frame 150mm, right inside opening, double wall, class B0 fireproof door:
Fireproof B0 1800x650-150-RI



B15/B0级独立围壁防火门

B15/B0 Class Partition Fireproof Door

CB/T3518.3


一、适用范围 Scope of Use

各类船舶及海洋工程建筑物上具有耐火分隔要求的舱室和生活模块。

The cabins & living modules with fireproof division requirement of structures on various ships and sea projects.

二、B15/B0级独立围壁防火门图例说明

Figure of B15/B0 class partition fireproof door

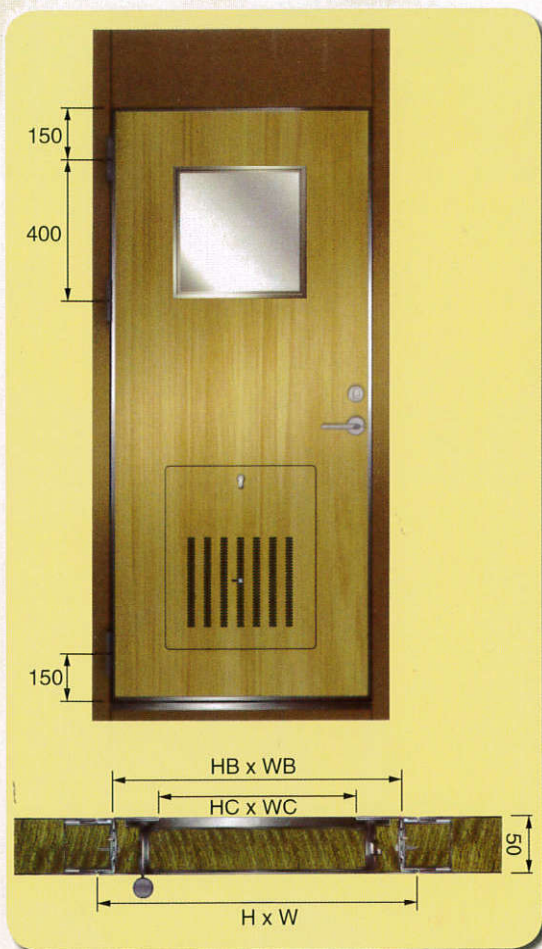

规格及尺寸 Types and size

通孔尺寸 Clear size HCXWC	门框外形尺寸 Size of door frame HBXWB	围壁开孔尺寸 Cut in Bulkhead HTXW	门框厚度 Thickness of Door Frame D
1600x600	1700x700	HTx700	D=50
1600x650	1700x750	HTx750	
1600x700	1700x800	HTx800	
1600x750	1700x850	HTx850	
1650x600	1750x700	HTx700	
1650x650	1750x750	HTx750	
1650x700	1750x800	HTx800	
1650x750	1750x850	HTx850	
1650x800	1750x900	HTx900	
1700x600	1800x700	HTx700	
1700x650	1800x750	HTx750	
1700x700	1800x800	HTx800	
1700x750	1800x850	HTx850	
1700x800	1800x900	HTx900	
1750x600	1850x700	HTx700	
1750x650	1850x750	HTx750	
1750x700	1850x800	HTx800	
1750x750	1850x850	HTx850	
1750x800	1850x900	HTx900	
1800x600	1900x700	HTx700	
1800x650	1900x750	HTx750	
1800x700	1900x800	HTx800	
1800x750	1900x850	HTx850	
1800x800	1900x900	HTx900	
1850x600	1950x700	HTx700	
1850x650	1950x750	HTx750	
1850x700	1950x800	HTx800	
1850x750	1950x850	HTx850	
2000x900	2100x1000	HTx1000	

HT为舱室净高+20

标记示例

1、通孔尺寸1800x650，门框厚度为50，右内开，独立壁，B0级防火门：防火门 B0 1800x650-150-RI

Identification example:

1、Clear size 1800x650,thickness of door frame 50mm,right inside opening,single wall,Fireproof door B0 1800Xx650-50-RI

A60级风雨密防火门

A60 Class Weathertight Fireproof Door

海工专用

Specially Used For Sea Project


一、适用范围 Scope of Use

各类船舶及海洋工程建筑物上具有耐火分隔要求的舱室和生活模块。

The cabins & living modules with fireproof division requirement of structures on various ships and sea projects.

二、A60级风雨密防火门图例说明

Figure of A60 class weathertight fireproof door

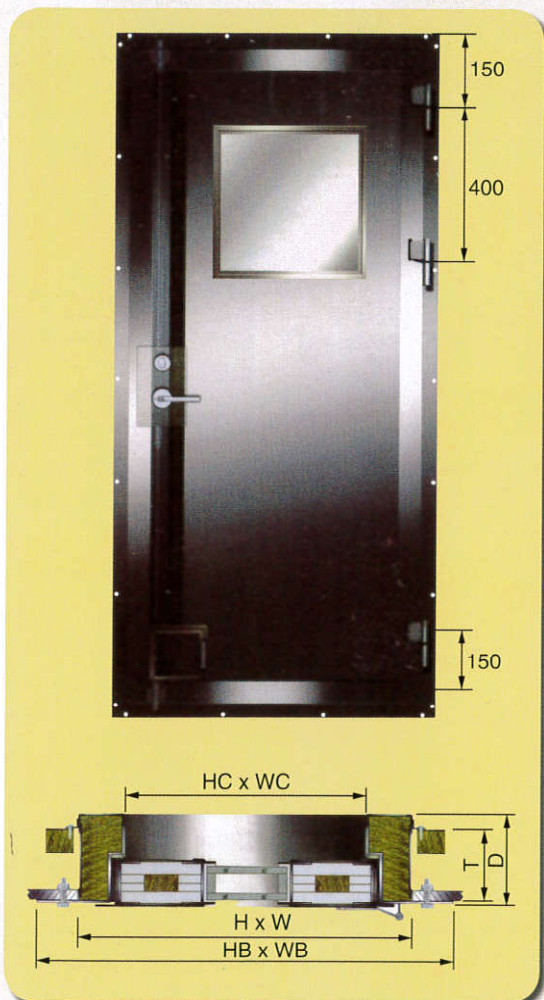

标记示例


1、通孔尺寸1700x600,门框厚度为150,右外开,双层壁, A60级风雨密防火门: 风雨密防火门 A60 1700x600-150-RO

Identification example:

1、Clear size 1700x600,thickness of door frame 150mm, right opening,double wall,class A60 weathertight fireproof door:Weathertight fireproof door A60 1700x600-150-RO

适应舱壁 Used for the bulkhead

单层壁
Single wall



双层壁
Double wall



规格及尺寸 Types and size

通孔尺寸 Clear size HCXWC	门框外形尺寸 Size of door frame HBXWB	围壁开孔尺寸 Cut in Bulkhead HXW	门框厚度 Thickness of Door Frame D
1600x600	1693x693	1700x700	D=T + 30 (T为装饰壁厚度) (T for Thickness of decoration layer)
1600x650	1693x743	1700x750	
1600x700	1693x793	1700x800	
1600x750	1693x843	1700x850	
1650x600	1743x693	1750x700	
1650x650	1743x743	1750x750	
1650x700	1743x793	1750x800	
1650x750	1743x843	1750x850	
1650x800	1743x893	1750x900	
1700x600	1793x693	1800x700	
1700x650	1793x743	1800x750	
1700x700	1793x793	1800x800	
1700x750	1793x843	1800x850	
1700x800	1793x893	1800x900	
1750x600	1843x693	1850x700	
1750x650	1843x743	1850x750	
1750x700	1843x793	1850x800	
1750x750	1843x843	1850x850	
1750x800	1843x893	1850x900	
1800x600	1893x693	1900x700	
1800x650	1893x743	1900x750	
1800x700	1893x793	1900x800	
1800x750	1893x843	1900x850	
1800x800	1893x893	1900x900	
1850x600	1943x693	1950x700	
1850x650	1943x743	1950x750	
1850x700	1943x793	1950x800	
1850x750	1943x843	1950x850	
1850x800	1943x893	1950x900	
2000x900	2100x1000	2100x1000	